

PRO SERIES

KOMBO

VALUE-PRICED THERMO-ACOUSTIC UNDERLAY


Pro Series Kombo offers a three-in-one underlay at a value-conscious price: it's a floating floor underlay, a vapor retarder and acoustic underlay all in one easy to install product. Kombo features a top layer of high density polyethylene foam with an integral foil vapor retarder, and delivers excellent acoustic insulating performance with an AIIC rating of 58. Kombo is for use in floating floor installations over concrete or plywood subfloors and can be used on, above or below grade. It's also approved for use over radiant heat. Kombo is a Class III- permeable underlay with a perm rating of 2.18. In certain circumstances (eg: on grade or below grade installations) an additional Class 1 non-permeable vapor barrier with a perm rating of less than 0.15 may be required. For further details please refer to NWFA guidelines.

FEATURES

- Superior soundproofing performance (AIIC 58, Delta 22)*
- Helps correct minor subfloor irregularities
- Integral foil membrane inhibits vapor transfer and heat loss
- High density cross-linked foam construction
- Easy to install, cuts with scissors

USES

- For floating installations of engineered hardwood,
- Also for use with laminate and vinyl composite core products (without integral underlay)

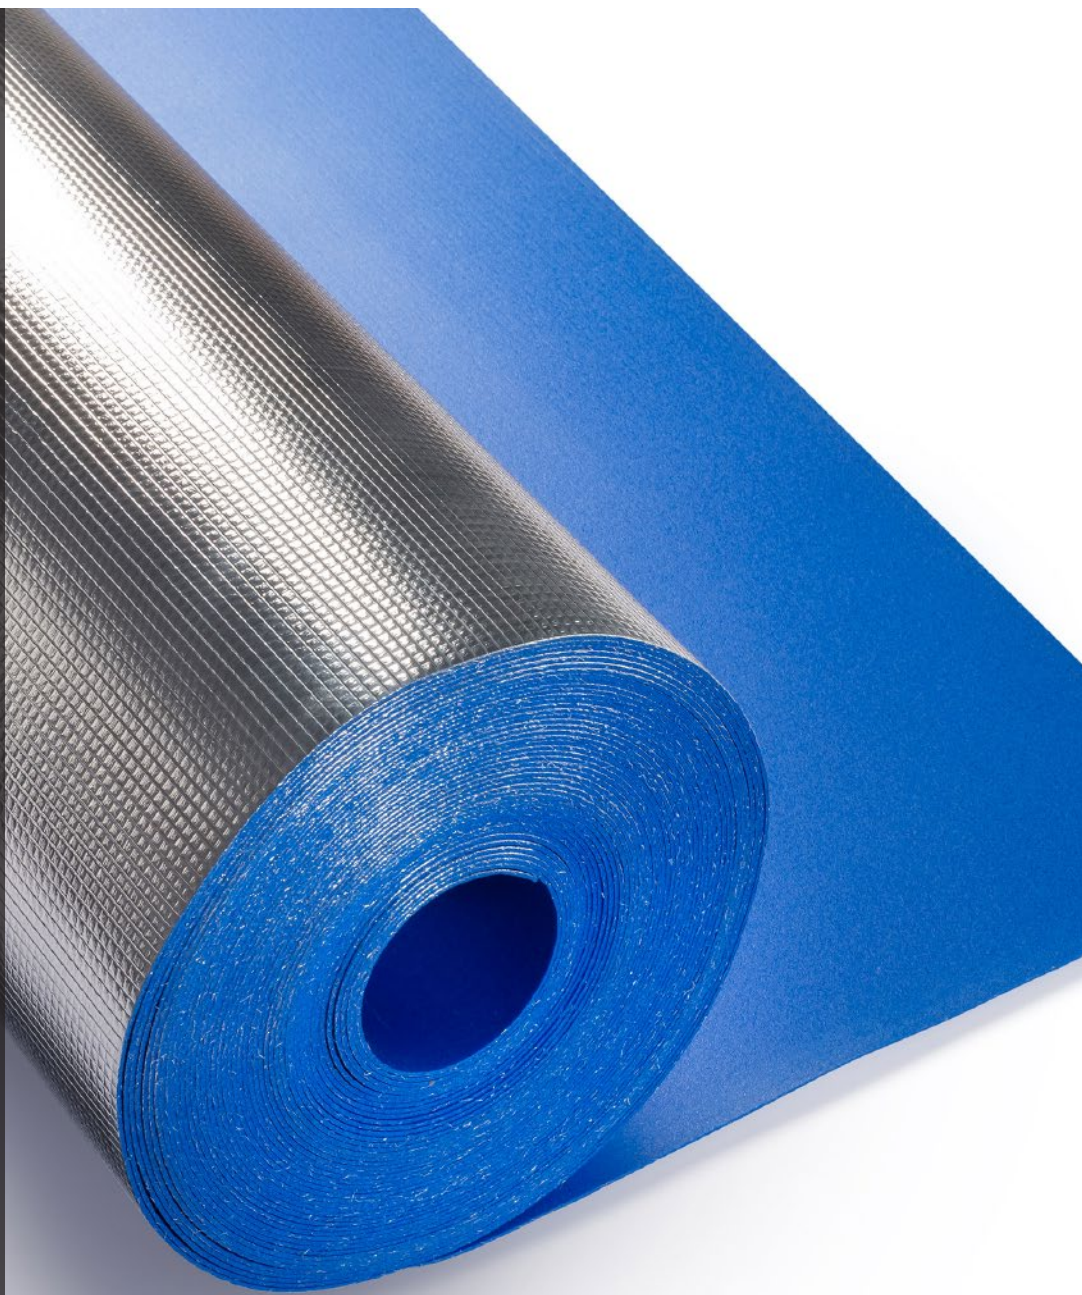

PRODUCT SPECIFICATIONS:

AIIC Rating*: 58
Delta*: 22
ASTC/STC: 55


*Testing scenario: 7/16" engineered hardwood over Kombo on 7½" concrete subfloor with no ceiling. Results will vary depending upon the building structure and various floor/ceiling assemblies. Contact Metro's Technical Service Department for assistance in developing a flooring assembly solution for your project.

Thickness: 2 mm
Width: Approx 44"
1150 mm
Length: Approx 80'
4.24 m

Coverage (per roll): 300 sq/ft
27.88 sq/m

Weight: 13.6 lb / 6.2 kg
SKU # 3122027

INSTALLATION OPTIONS:




Above grade: OK
On grade: OK
Below grade: OK



NO



NO



YES



YES