


## AMB 2000 Underlay System for Engineered Hardwood, Laminate, Vinyl, Carpet Tile and Vinyl Composite **Saves Time, Energy and Budget**

A high performance 2mm underlay floor prep system that floats over the subfloor avoiding costly double-stick installations. AMB 2000 is your moisture vapor barrier, cushioning and noise suppression solution in one easy to use product.

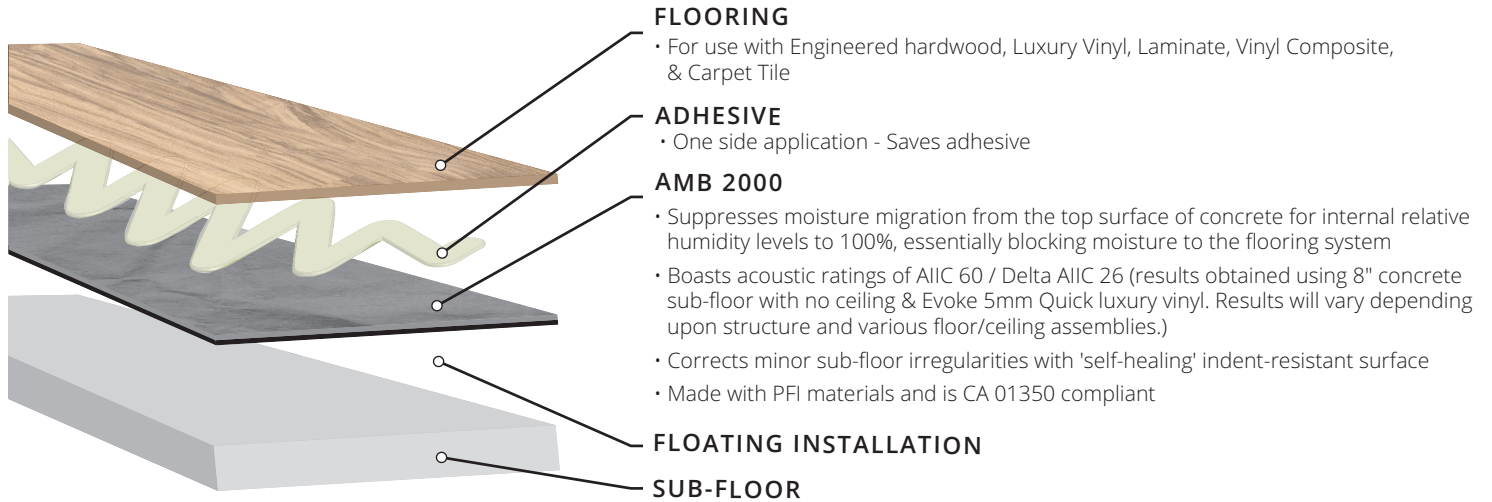

### PRODUCT PERFORMANCE

**Less adhesive:** AMB floats, flooring is adhered to AMB reducing adhesive usage by 50% or more.

**Reuse or Recycle:** Can be reused in most situations, facilitates simple board replacements (depending on install method) and recyclable. Eliminates the need to remove most existing flooring saving the cost of demo/removal.

**Blocks moisture:** Suppresses moisture migration to the flooring system, from the top surface of concrete for internal relative humidity levels to 100%.

**Noise suppression:** AIIIC 60 / Delta AIIIC 26. Results obtained using 8" concrete sub-floor with no ceiling and Evoke 5mm Quick LV. Results will vary depending upon structure and floor/ceiling assemblies.

**Secure and stable:** Includes a fiberglass core for stability and an embossed back-layer which reduces potential movement of flooring system.

**Corrects and cushions sub-floor:** Minor sub-floor irregularities are corrected and has a 'self-healing' indent-resistant surface for excellent cushioning.


Made with PFI materials and tests to CA 01350 for indoor air quality.



### PRODUCT SPECIFICATIONS

SKU #	3115174
Fire Test ASTM E662	Smoke Generation — Max. Spec. Optical Density of 450 or less
Fire Test ASTM E648	Critical Radiant Flux — .045 m <sup>2</sup> or greater Class 1
Nominal Thickness	.070"
Density	54.93 lb <sup>3</sup> /ft <sup>3</sup>
Width	6' (1.83M)
Length	65.62' (20M)
Weight	4.16 oz ft <sup>2</sup>
Quantity/Roll	393.96 ft <sup>2</sup>

### FOR USE WITH

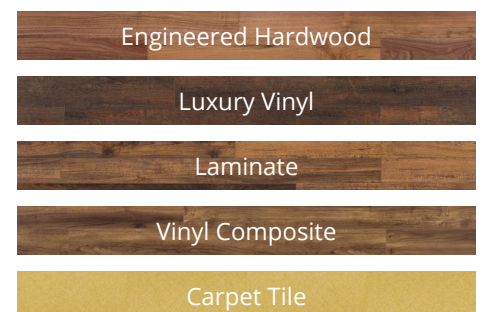

For Sales Support:  
 AMB installed with vinyl and carpet tile: [evokelvhelp@evokeflooring.com](mailto:evokelvhelp@evokeflooring.com)  
 AMB installed with wood flooring: [techserv@metrofloors.com](mailto:techserv@metrofloors.com)

For Technical Support: [techserv@metrofloors.com](mailto:techserv@metrofloors.com)